

MRS. D. BANERJEE
PRINCIPAL



EMAIL - DAVKOYLANAGAR@GMAIL.COM
WEB SITE - WWW.DAVKOYLANAGAR.COM
☎ : 0326 - 2230715
FAX : 0326 - 2230715
MOB. NO. - 9905521779

D.A.V. PUBLIC SCHOOL , KOYLA NAGAR
BCCL TOWNSHIP, KOYLANGAR, DHANBAD- 826005

SCHOOL NO.:66202

AFFN NO. 3430148,

Ref. No. DAVKN/Tender/2026-27/ 169

Date: 28-05-2026

Notice for inviting Tender/Quotations

Sealed quotations/Tenders from reputed and experienced Civil Contractors with good Credential for construction work (Brick wall with pluster and white washing as per details attached) are invited by the undersigned on behalf DAV Public School , BCCL Township, Koylanagar, Dhanbad (JH). Please go through the following Points /Terms & conditions before submitting the Tender/Quotations.

- Date for submitting the Quotations/Tenders – w.e.f. 29-05-2026 9.30 a.m. to 06-05-2026, 2.30 p.m.
- Sealed Tender/Quotations are to be submitted by hand /authorized in the office of the undersigned as per date and time mentioned above.
- Registration and Licences: Must Pocess the valid registration and relevant Licennces for the work cartegory.
- The company/Contractor must have a valid GSTIN and PAN Number and to be mentioned in the quotation/Tender.
- Experience: The Contractor must have an experience for at lease five years in the field.
- Financial ability: The contractor must have financial ability to complete the work as per schedule without any Avance for the same.
- No any alteration to be done beyond the drawing/schedule
- The Payment will be made after a maximum time of 30 days after completing the work verified and satisfied by the School's Architect as per parameter fixed by them.
- TDS will be deducted as per norms.
- The Work(s) will be awarded to the lowest bidder only in full rate/total value and complete the all parameters as per schedule and drawing. No part work will be awarded in any condition.
- The work order may be cancelled by the Authority if the work is not accepted and started within one week from the date of issue.
- No payment will be done if the work is not completed within 15 days from the day of starting.
- School's Building-sub-Committee alongwith the Architect will supervise the quality of the materials.

Schedule , Drawing and Annexure (to be filled by the contractor) are attached herewith.

D. C. Banerjee
28/5/2026.

(D. C. Banerjee)

Principal
PRINCIPAL
D.A.V. PUBLIC SCHOOL
KOYLA NAGAR DHANBAD



ON COMPANY LETTER HEAD

ANNEXURE-1

(IT IS MANDATORY FOR ALL BIDDERS ; THEY SHOULD FILL ALL FIELDS "CLEARLY" IN THIS FORM)

~~DAV PUBLIC SCHOOL~~ WORK AT DAV PUBLIC SCHOOL KOYLA NAGAR

1	Name of company /Firm/Agency and its Registration no.	:	
2	Name of Proprietor /director of the company /firm/ agency registration must be enclosed	:	
3	Full Address of Reg. Office(A copy of company/firm registration must be enclosed	:	
	Telephone no / Mobile number	:	
5	E- mail - ID	:	
6	Details of Banker/ Bank with full address	:	
7	Bank A/C Num. (Proof attaché)	:	
8	PAN/GSTIN Registration Number of firm (Enclosed a copy of the same)	:	

Place:

(Signature of Authorized Person)

Date:-

Full Name:

(Seal)



P-2

In the Contractor's Letter Head


5.1	Material and Labour for two or more coats of enamel paint of approved shade and of approved manufacturer over newly plastered surfaces including preparation of surfaces	85.56	Sq.m	Amount (Rs)
	Grand Total exclusive of taxes			

P/2/2

In the Contractor's Letter Head

ITEM NO.	DESCRIPTION	QTY	UNIT	Amount (Rs)
1	Site Preparation			
1.1	Site preparation and breakage and removal of debris	1	LS	
2	Brick Work			
	Material and labour for Brick work in cement mortar (1:4) using sand using 1st class, best locally available bricks of class designation 75.			
2.1	As in substructure up to beam soffit level	5.54	cu.m	
3	Finishes - Plaster			
3.1	Material and Labour for 12-15mm thick cement plaster in CM (1:4) i.e 1 part of cement: 4 part of sand consisting of 66% fine sand and 34% coarse sand as approved on concrete surfaces as in ceilings on soffits stairs, landings, chajjas, projections, shelves, etc. including toweling the pestered surfaces to even and smooth finish with steel trowel without using extra cement.	85.56	Sq.m	
3.1	Providing and fixing 150mm wide chicken wire mesh (24 s.w. gauge) at the junction of R.C.C and brick work including fixing with G.I nails at all floor and for all heights.	2.07	Sq.m	
4	1 inch kota stone ledge			
4.1	Material & Labour for Kota Stone ledge or equivalent as approved,	3.69	Sq.m	

Contd. P. 2

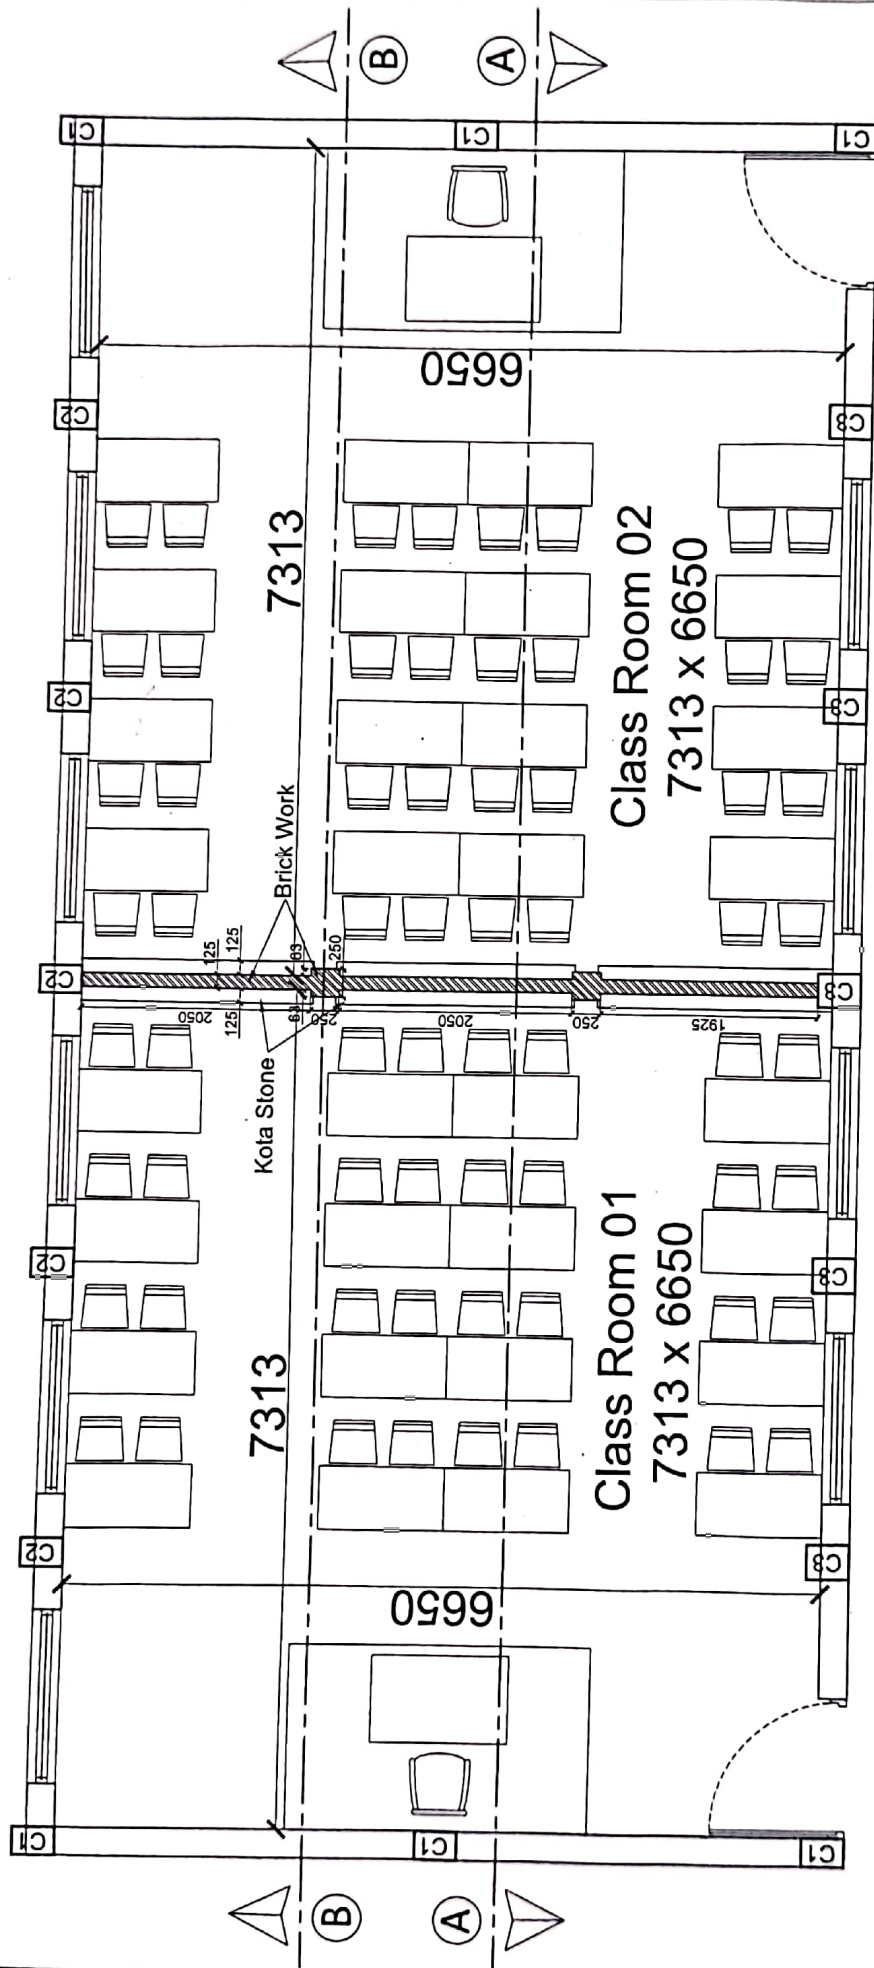

1st & 2nd Floor

	<p>The contractor must verify all dimensions of the job and report any discrepancies to architect before execution of the work.</p>	<p>Project: DAV Koyla Nagar, Dhanbad, Jharkhand.</p>	<p>Dwg. Title: Floor Plan</p>
		<p>Client: Principle, DAV Koyla Nagar</p>	<p>Sub. Title: 1st & 2nd Floor plan</p>
<p>Note Dimensions are in mm unless specified otherwise Wall thickness = 250mm</p>	<p>AG Architects & Associates Architecture Planning Interior 104, First floor, IITVIT Gokul, Dhanbad - Jharkhand Gol Building, P.O. G.G. Aulron, Dhanbad, Jharkhand - 828127. www.agarchitects.in Ph.</p>	<p>Architects:</p>	<p>Scale: NIS</p>
		<p>Job No: ADA/23/123-DW</p>	<p>Date: 25.05.2026</p>
		<p>Checked By: M. A. Khan</p>	<p>Dwg. No. 33.0-01</p>