



D.A.V. PUBLIC SCHOOL , KOYLA NAGAR
BCCL TOWNSHIP, KOYLANGAR, DHANBAD- 826005

SCHOOL NO.:66202

AFFN NO. 3430148,

Ref. No. DAVKN/Tender/2026-27/ 438

Date: 28-07-2026

Notice for inviting Tender/Quotations

Sealed quotations/Tenders are invited from reputed and experienced Civil Contractors with good Credential for Repairing work of Chhajja (sun shades), Pillars, Wall Pluster etc as per site scene and BOQ attached herewith in respect of the DAV Public School, BCCL Township, Koylanagar, Dhanbad (JH). **Please go through the following Points /Terms & conditions before submitting the Tender/Quotations. The Contractors may visit the site under permission of the undersigned for verification in details.**

- Date for submitting the Quotations/Tenders – w.e.f. 29-07-2026 9.30 a.m. to 05-07-2026, 2.30 p.m.
- Sealed Tender/Quotations are to be submitted by hand /authorized in the office of the undersigned as per date and time mentioned above.
- Registration and Licences: Must Pocess the valid registration and relevant Licennces for the work category.
- The company/Contractor must have a valid GSTIN and PAN Number and to be mentioned in the quotation/Tender.
- Experience: The Contractor must have an experience for at lease five years in the field.
- Financial ability: The contractor must have financial ability to complete the work as per schedule without any Avance for the same.
- No any alteration to be done beyond the drawing/schedule
- The Payment will be made after a maximum time of 45 days after completing the work verified and satisfied by the School's Architect as per parameter fixed by them.
- TDS will be deducted as per norms.
- The Work(s) will be awarded to the lowest bidder only in full rate/total value and complete the all parameters as per schedule and drawing. No part work will be awarded in any condition.
- The work order may be cancelled by the Authority if the work is not accepted and started within one week from the date of issue.
- No payment will be done if the work is not completed within 30 days from the day of starting.
- School's Building-sub-Committee alongwith the Architect will supervise the quality of the materials.
- It should clear that the rate is with or without GST
- The Contractor should given all company details in their letter head as a separate Annexure.

Schedule/BOQ and site scenes are attached herewith . Annexure (all company details in their letter head to be filled by the contractor).

(Handwritten signature)
(D. C. Banerjee)

Principal


PRINCIPAL
D.A.V. PUBLIC SCHOOL
KOYLA NAGAR DHANBAD





Date : 27-07-2026

As per the site inspection the school building, following points were observed visually regarding the safety and repairing work:

1. Few of the columns are in bad state and need to be repaired immediately because of the crack developed in it and the reinforcement is exposed.
2. The outer wall also needs to be repaired and re-plastered.
3. The toilet drainage and rain water pipes are to be checked and adjoining has to be repaired as there is water seepage problem.
4. The chajja on all sides are damaged and need to be repaired.

Some site pictures are attached to verify the existing condition of the building.

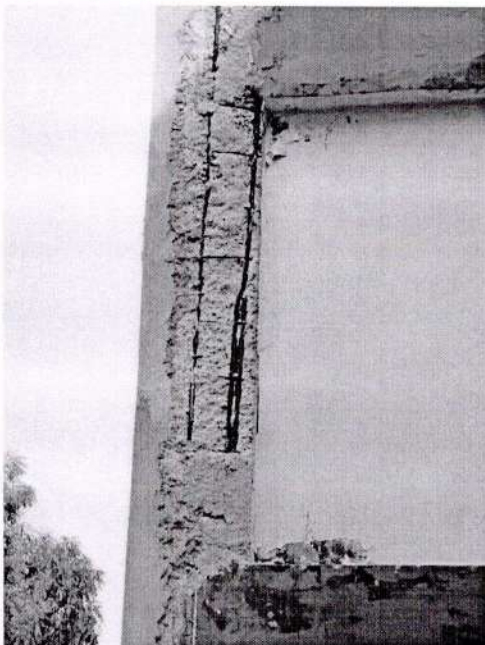

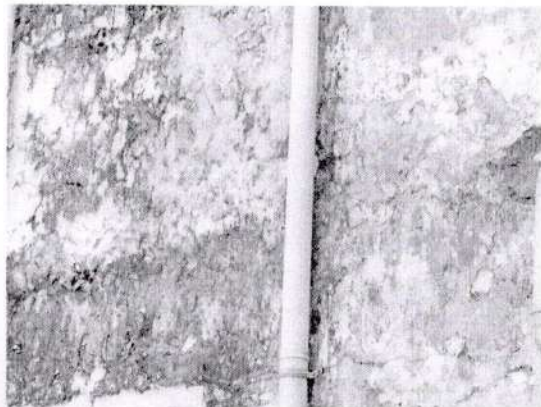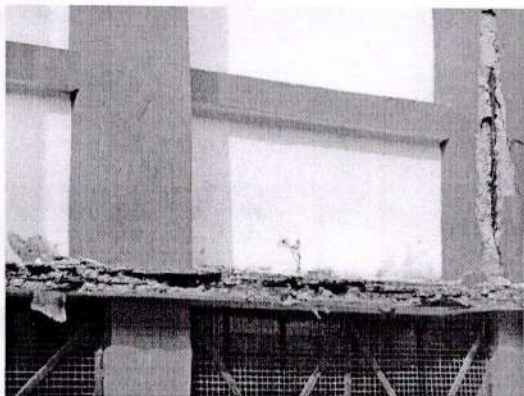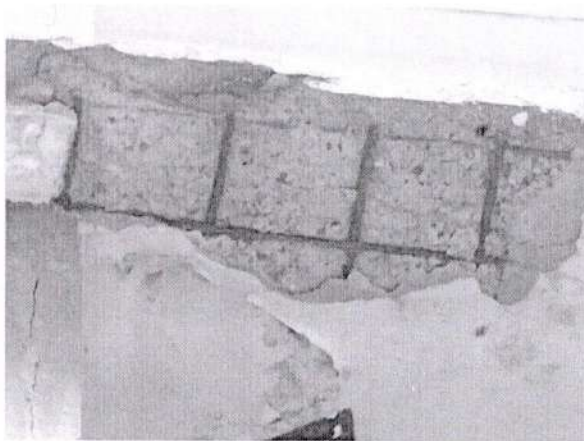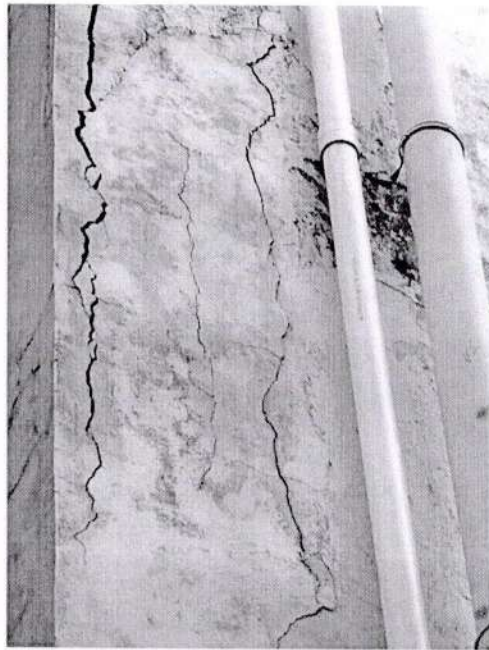

S. No.	Item Description	Unit	Rate	Quantity	Amount
1	Repairing of R.C.C. Column upto 3.0 m. height i/c chipping of cracks and flakes and filling gaps with cement plaster 1:4 over a coat of neat cement slurry, with clean coarse sand of F.M. 1.5 including screening, curing with all leads and lifts of water, scaffolding taxes and royalty all complete as per building specification and direction of E/I.	cum.		40.00	
2	Dismantling of R.C.C. chajja upto 75 mm. thk. and casting with R.C.C.M-150 with nominal mix (1:2:4) in chajja with approved quality of stone chips 20 mm to 6mm size graded and clean coarse sand of F.M. 2.5 to 3 including making drip course in concrete, screening, centering, shuttering and mixing cement concrete in mixer and placing in position, vibrating, striking, 6mm cement plaster (1:4) in ceiling and sides of chajja with sand of F.M. 1.5 curing (but excluding the cost of reinforcement) taxes, and royalty all complete as per building specification and direction of E/I.	sqm.		400.00	
3	Providing 12mm cement plaster (1:4) in chajja with clean coarse sand of F.M. 1.5 including screening, curing with all leads and lifts of water, scaffolding taxes and royalty all complete as per building specification and direction of E/I.	sqm.		837.00	
4	Dismantling of brickwork in superstructure and finishing with 12mm cement plaster (1:4) with clean coarse sand of F.M. 1.5 including screening, curing with all leads and lifts of water, scaffolding taxes and royalty all complete as per building specification and direction of E/I.	sqm.		4235.00	
				Total -	

Note:

1. The estimate doesn't include painting of the newly repaired wall, chajja and pillar surface
2. Pillar repairing work is to be taken in cubic meter as the RCC work is estimated in volume rather than surface area depending upon the size of the pillar.
3. Pillar repairing rate is in including bars and nets if/ as required
4. The rate is as per LS basis as the area of dismantling could not be estimated. It may exceed during dismantling of the affected areas.

(Architect)